



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.





Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1



X: W/O Central support



S: W/ Central support

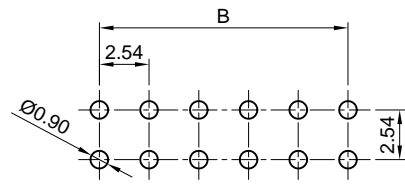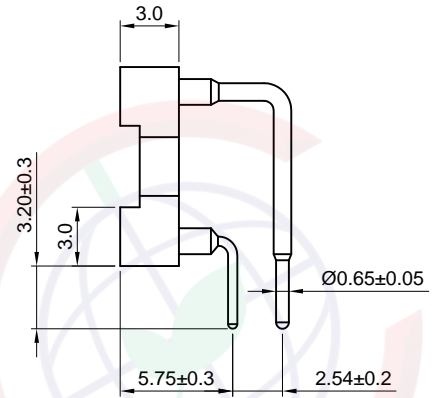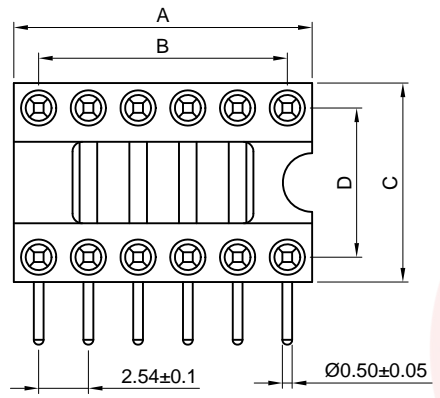

Recommend PCB layout
Tolerance=±0.05



(Series Image-Reference Only)

Positions	Dimension			
	A±0.5	B±0.3	C	D±0.2
06	7.62	5.08	10.16	7.62
08	10.16	7.62	10.16	7.62
10	12.70	10.16	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
28	35.56	33.02	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	17.78	15.24
32	40.64	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/26/16'		LJC 05/26/16'
B	DRAWING UPDATE	JLZ 07/21/18'		

NOTES:

- Materials:
 - Insulator: Thomerplastic,UL94-V0,Black.
 - Pin: Copper Alloy, Plating Tin .
 - Clip: Beryllium Copper,plating Gold.
- Performance:
 - Contact resistance: 20mΩ Max.
 - Dielectric withstanding voltage: 500V AC/60s.
 - Insulation resistance: 1000MΩ Min.
 - Current rating: 1A.
 - Voltage rating: 30V AC/DC.
 - Temperature range: -40~+105°C.
- Product number code:

DS1001-04 - X X X X X X

- Central support
- S: W/ Central support
- X: W/O Central support
- Clip plating
- F6: Full gold flash
- Housing material
- S: PPS
- Width
- N: 7.62mm(06-24P)
- W: 15.24mm(24-40P)
- Pin plating
- T1: Full tin
- 8: Full gold flash
- Clip type
- B: 4 Fingers
- No.of contacts
- 06 08 10 12 14 16
- 18 20 24 28 32 40

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	UNITS mm	IC SOCKET PITCH 2.54mm RIGHT ANGLE TYPE
.X ±0.38	.X ±3°	SHEET SIZE A4	SERIES DS1001-04 SERIES
.XX ±0.25	.XX ±2°		
DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1001-04-XXXXX-B		

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD