
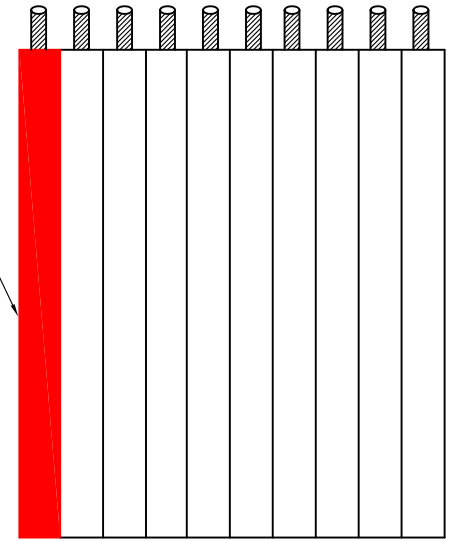


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/18/07		LJC 08/18/07
D	DRAWING UPDATE	JLZ 05/22/19'		


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

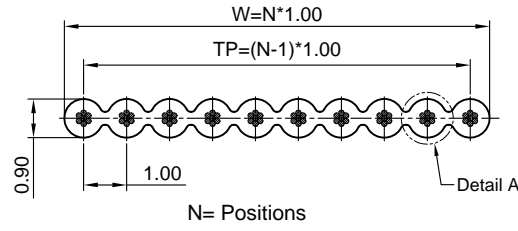

- NOTES:**
- Insulation material: PVC  
Color: Grey or dark grey
  - Specification
    - Rating: 300V
    - Conductor Size: 28~30AWG
    - Insulation resistance: 100MΩ/km min.
    - Operating temperature:-20°C~70°C.
  - Application
    - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

- 4. Product Number Code**  
DS1057-01 - X X X X X - X
- Packing Specifications
    - 30.5: 30.5M/reel
    - 60.1: 60.1M/reel
    - 76.5: 76.5M/reel
    - 153.0: 153M/reel
  - Edge mark
    - R: Red mark
    - F: Flower mark
  - Wire diameter
    - 1: Ø0.100 (30AWG)
    - 2: Ø0.127 (28AWG)
  - Wire AWG
    - 28: 28AWG
    - 30: 30AWG
  - Cable color
    - A: Gray
    - S: Dark grey
  - No. Of positions
    - 06: 6 Pin
    - .....
    - 64: 64 Pin

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
06	5.00	6.00	±0.30	Ø0.100<0.397 Ø0.127<0.237
08	7.00	8.00	±0.30	
10	9.00	10.00	±0.30	
14	13.00	14.00	±0.30	
16	15.00	16.00	±0.30	
20	19.00	20.00	±0.30	
24	23.00	24.00	±0.30	
26	25.00	26.00	±0.30	
30	29.00	30.00	±0.30	
34	33.00	34.00	±0.40	
40	39.00	40.00	±0.40	
50	49.00	50.00	±0.40	
60	59.00	60.00	±0.40	
64	63.00	64.00	±0.40	

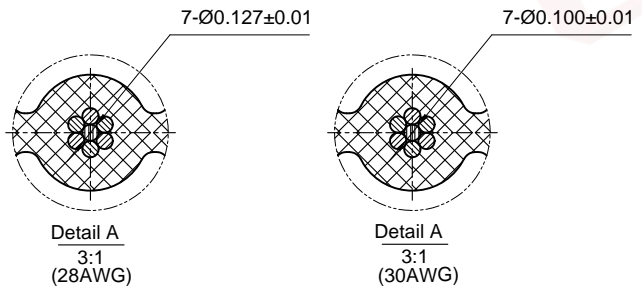

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	UL 2651 PITCH 1.00mm FLAT CABLE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1057-01 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY CONNELY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1057-01-XXXXX-X-D					