



The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/29/14'		LJC 12/29/14'
B	DRAWING UPDATE	JLZ 09/05/19'		
C	DRAWING UPDATE	JLZ 03/15/22'		


Solder type

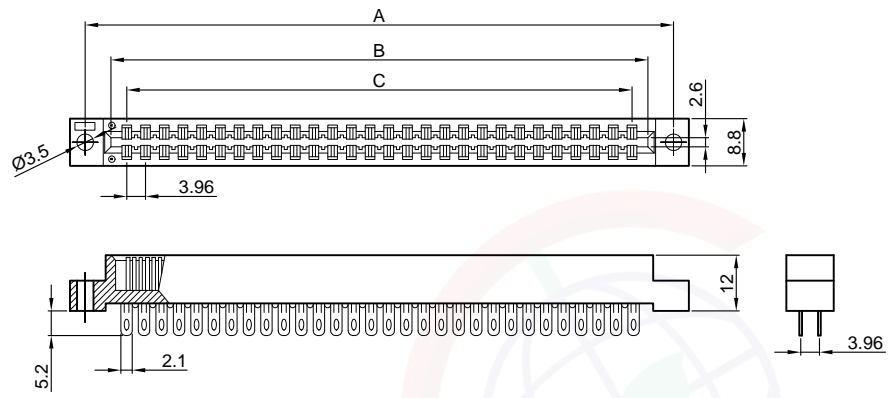

Vertical type

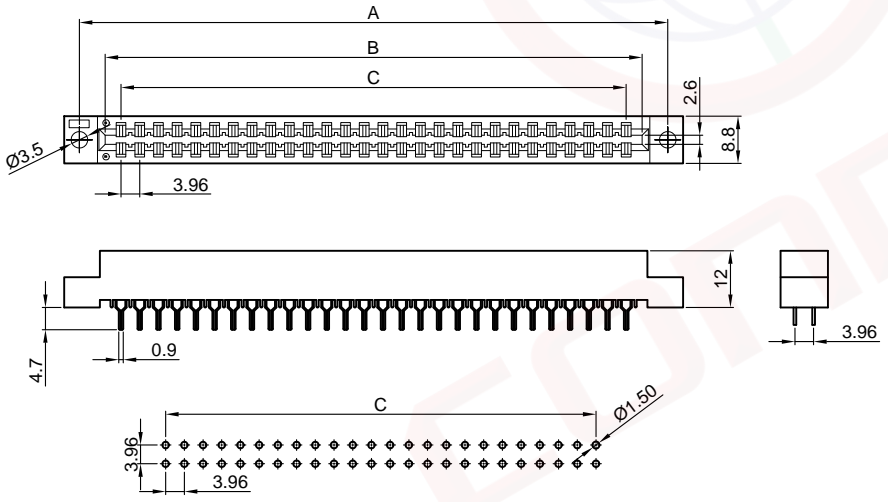

Recommend PCB layout

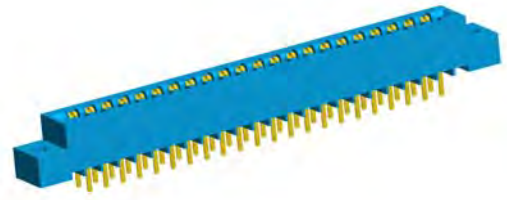

(Series Image-Reference Only)

NOTES:

- Specifications
 - Contact Resistance: 30mΩ max.at DC 100mA
 - Insulation Resistance: 1000MΩ min.
 - Current Rating: 5A
 - Dielectric Withstanding Voltage: 500V For 1 minute
 - Operating Temperature: -40°C~+105°C
- Materials
 - Contact: Copper Alloy.
 - Housing: PBT.

3. Product number code:

DS1060-02 - X X X

- Terminal style
 - 009: Solder type
 - 029: Vertical type
- Contact Plating
 - 0: Selective gold flash
 - 8: Full gold flash
- No. of contacts
 - 08 12 16 20 24
 - 30 36 44 56 72

DIMENSIONS

Pos	A	B	C
08	30.34	20.18	11.88
12	38.26	28.10	19.80
16	46.18	36.02	27.72
20	54.10	43.94	35.64
24	62.02	51.86	43.56
30	73.90	63.74	55.44
36	85.78	75.62	67.32
44	101.62	91.46	83.16
56	125.38	115.32	106.92
72	157.06	146.90	138.60

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	3.96mm Card Edge Socket	
X.	±0.60	X.	±5°	UNITS	mm	Solder & V/T Type		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1060-02 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNPLY ELECTRONIC CO., LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1060-02-XXX-C						