
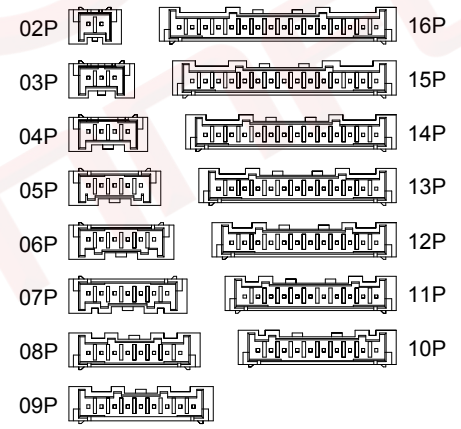

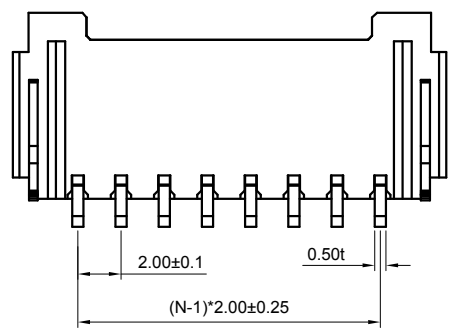


|      |     |
|------|-----|
| Dept | Qty |
| DC   | 1   |
| ED   | 1   |
| IE   | 1   |
| ISO  | 1   |
| PD   | 1   |
| R&D  | 1   |
| SD   | 1   |
| QA   | 1   |
| QC   | 1   |
| QE   | 1   |


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays in exercising such rights does not constitute a waiver of such rights.

| REV. | DESCRIPTION    | DRAWN         | CHECKED | APPROVED |
|------|----------------|---------------|---------|----------|
| A    | NEW RELEASE    | JLZ 04/16/19' |         |          |
| B    | DRAWING UPDATE | JLZ 07/19/23' |         |          |
|      |                |               |         |          |

Notes:  
 Specifications:  
 1. Contact Resistance: 20mΩ Max.  
 2. Insulation Resistance: 1000MΩ Min.  
 3. Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.  
 4. Current Rating:2A.  
 5. Temperature: -40°C~+105°C.  
 Materials:  
 1. Contact Material: Copper Alloy.  
 2. Contact Plating: Gold or Tin Plating Over Nickel.  
 3. Insulator Material: Pa-9T,Ivory,UL94-V0.  
 Product Number Code:  
 DS1066-14- X X X X X X X

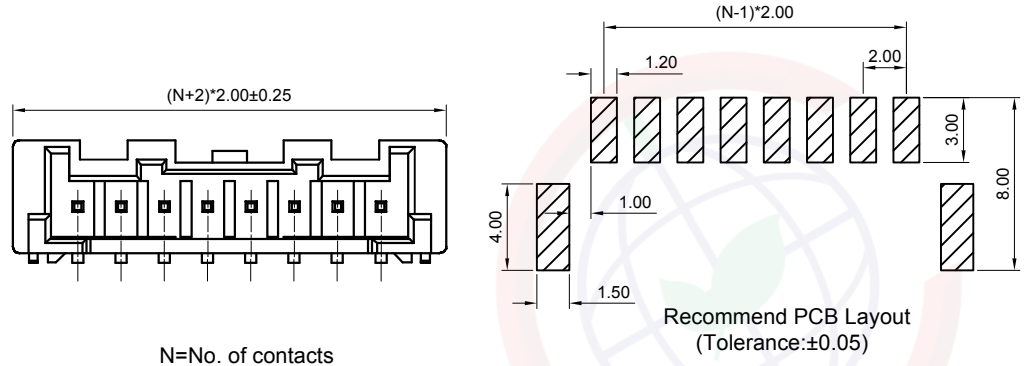

Packing type  
 R: Tape On Reel  
 Pick up support  
 X: W/O Pick up  
 Contact plating  
 6: Tin  
 8: Gold flash  
 Housing color  
 V:Ivory  
 Mounting type  
 S: SMT Type  
 Connector type  
 M: Male  
 No. of contacts  
 02~16

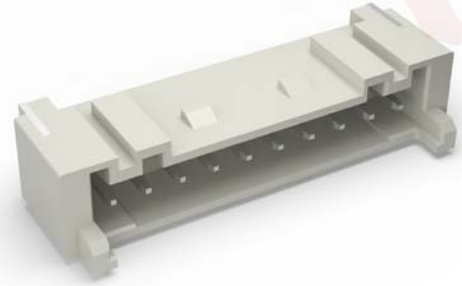

(Series Image-Reference Only)

|                   |                      |                 |        |
|-------------------|----------------------|-----------------|--------|
| GENERAL TOLERANCE |                      | ANGLE TOLERANCE |        |
| X.                | ±0.60                | X.              | ±5°    |
| .X                | ±0.38                | .X              | ±3°    |
| .XX               | ±0.25                | .XX             | ±2°    |
| DRAWING TYPE      |                      | CUSTOMER        |        |
| SCALE             | 1:1                  | SHEET           | 1 OF 1 |
| DRAWING NO.       | C-DS1066-14-XXXXXX-B |                 |        |

|            |    |        |                                     |  |
|------------|----|--------|-------------------------------------|--|
| PROJECTION |    | TITLE  | 2.00mm PA Wafer Horizontal SMT Type |  |
| UNITS      | mm | SERIES | DS1066-14 SERIES                    |  |
| SHEET SIZE | A4 |        |                                     |  |

晨翔电子有限公司  
 CONNELY CONNELY ELECTRONIC CO. LTD