


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

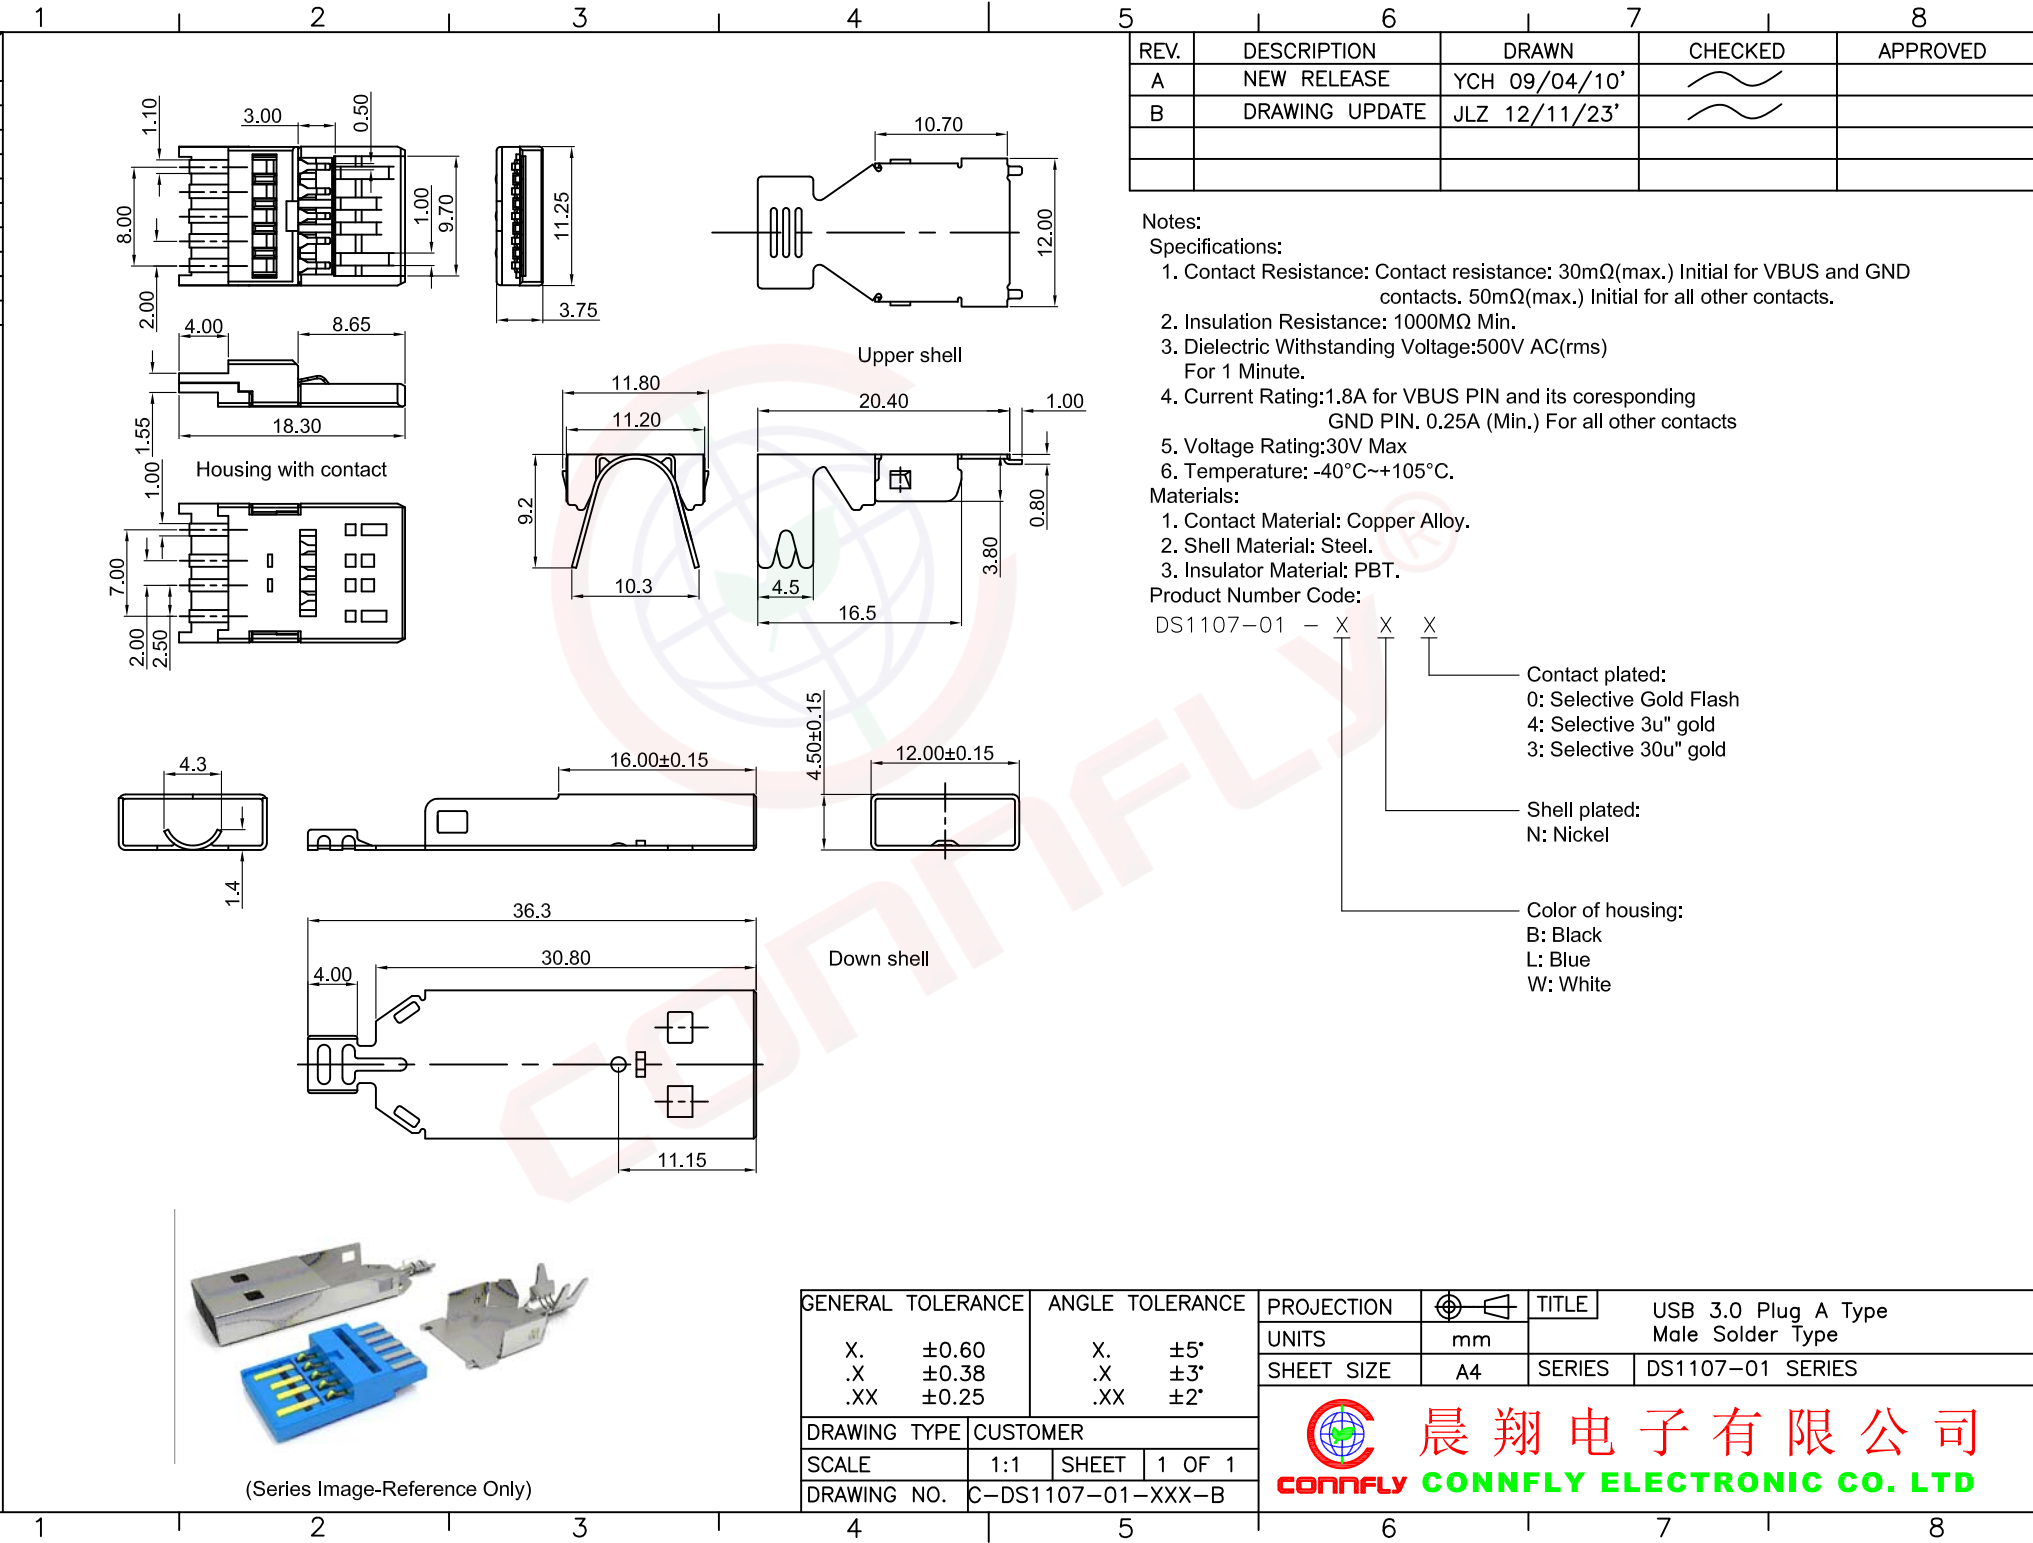


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/10'		
B	DRAWING UPDATE	JLZ 12/11/23'		

- Notes:
- Specifications:
- Contact Resistance: Contact resistance: 30mΩ(max.) Initial for VBUS and GND contacts. 50mΩ(max.) Initial for all other contacts.
  - Insulation Resistance: 1000MΩ Min.
  - Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
  - Current Rating: 1.8A for VBUS PIN and its corresponding GND PIN. 0.25A (Min.) For all other contacts
  - Voltage Rating: 30V Max
  - Temperature: -40°C~+105°C.

- Materials:
- Contact Material: Copper Alloy.
  - Shell Material: Steel.
  - Insulator Material: PBT.

Product Number Code:  
 DS1107-01 - X X X

- Contact plated:
  - 0: Selective Gold Flash
  - 4: Selective 3u" gold
  - 3: Selective 30u" gold
- Shell plated:
  - N: Nickel
- Color of housing:
  - B: Black
  - L: Blue
  - W: White

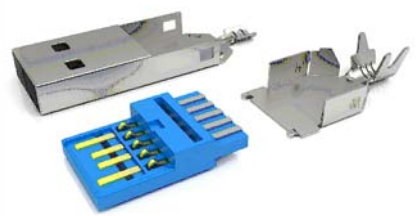

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1107-01-XXX-B		

PROJECTION		TITLE	USB 3.0 Plug A Type
UNITS	mm		Male Solder Type
SHEET SIZE	A4	SERIES	DS1107-01 SERIES

晨翔电子有限公司  
CONNFLY CONNELY ELECTRONIC CO. LTD