


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this information in any form or by any means, without the prior written permission of CONNELY, is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/18/18'		
B	DRAWING UPDATE	JLZ 01/10/23'		

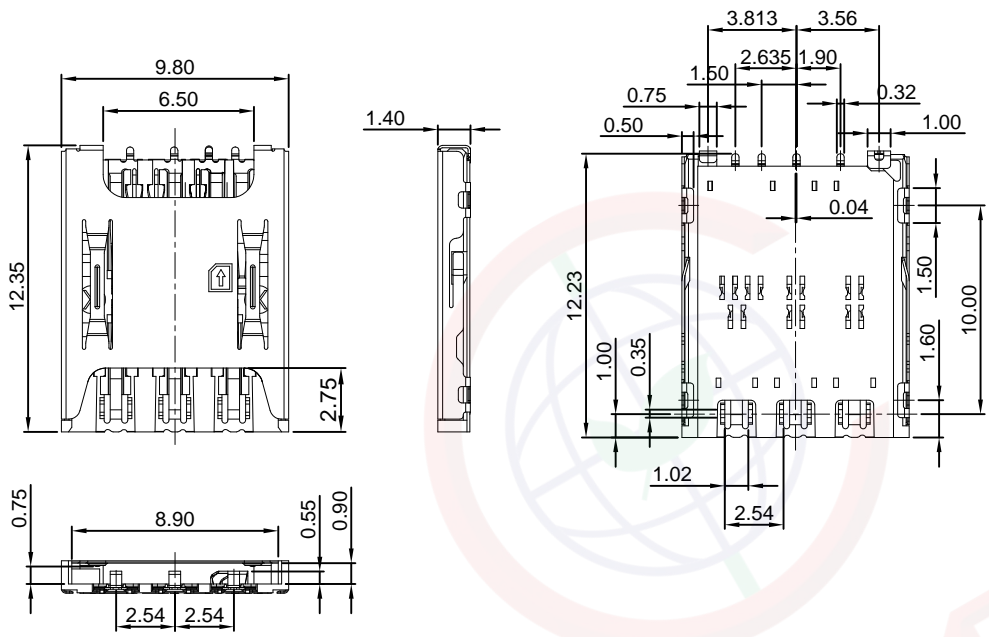


- Notes:
- Material:
 - Housing: High Temp., UL 94V-0 Color of Black.
 - Contacts: Copper Alloy.
 - Shell: Stainless Steel.
 - Finish:
 - Contact Area: Gold Over Nickel
 - Solder Area: Matte Tin.
 - Specifications:
 - Temperature Rated: -40°C TO +85°C
 - Contact Resistance: 100mΩ Max.
 - Insulation Resistance: 1000MΩ Min @ 500V DC.
 - Withstanding Voltage : 500V AC.
 - Current Rating: 0.5A.
 - Voltage Rating: 30V AC.
 - Product Number Code:

DS1138-15 - XX X X X X X X

 - Packing Type: R: Tape On Reel
 - Shell Plating: S: Stainless
 - Housing Color: B: Black
 - Contact Plating: 0: Selective gold flash
 - Mounting Type: S: SMT type
 - Connector Type: S: Socket
 - NO. Of Contacts: 06:6Pin

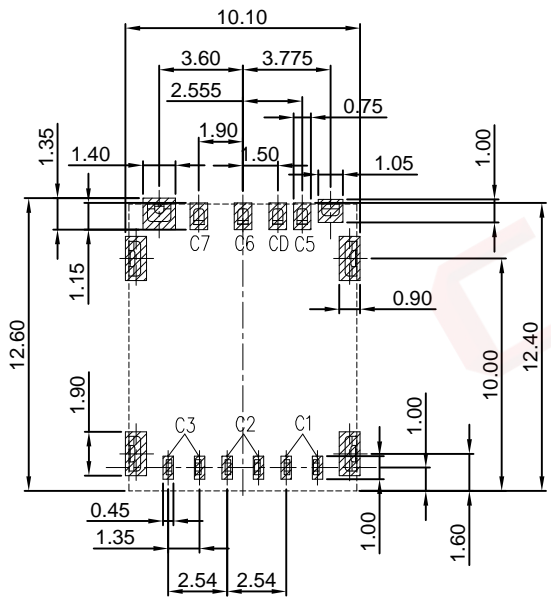

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C4	N/A
C5	GND
P6	VPP
P7	I/O
S/W	Switch Pin



SMT Solder Area
 Connector Area
 Recommend PCB layout
 (Tolerance:±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		Nano SIM Card 6P SMT H=1.4mm
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	A4	
DRAWING TYPE		CUSTOMER		SHEET	SERIES
SCALE		1:1		1 OF 1	DS1138-15 SERIES
DRAWING NO.		C-DS1138-15-XXXXXXX-B		晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD	