


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/28/22'		

NOTES:
 Standard UL
 Rated voltage:300V
 Rated current:8A
 Temp.Range:-40°C~+105°C
 Pitch:3.50mm
 Poles:2~24P
Materials:
 Contact: Copper Alloy,Tin plated.
 Insulator: Nylon.
 Product Number Code:

DS1159-14 - X X X
 Contact plating
 6: Tin
 Housing color
 G:Green
 No.of contacts
 2-24

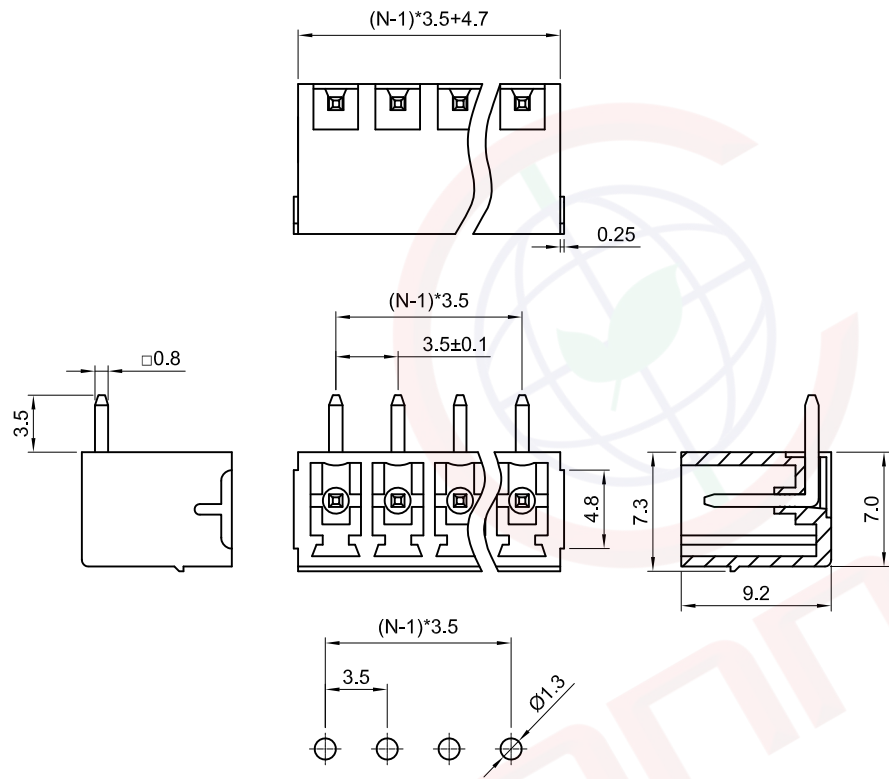

Recommend PCB layout
 (Tolerance:±0.05)

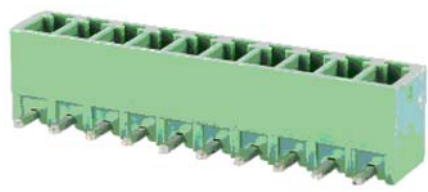

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	3.50mm Pluggable Terminal Block	
X.	±0.60	X.	±5°	UNITS	mm	R/A Type		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1159-14 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1159-14-XXX-A						

1 2 3 4 5 6 7 8