


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 01/09/09		LJC 01/09/09
B	DRAWING UPDATE	JLZ 08/14/18'		

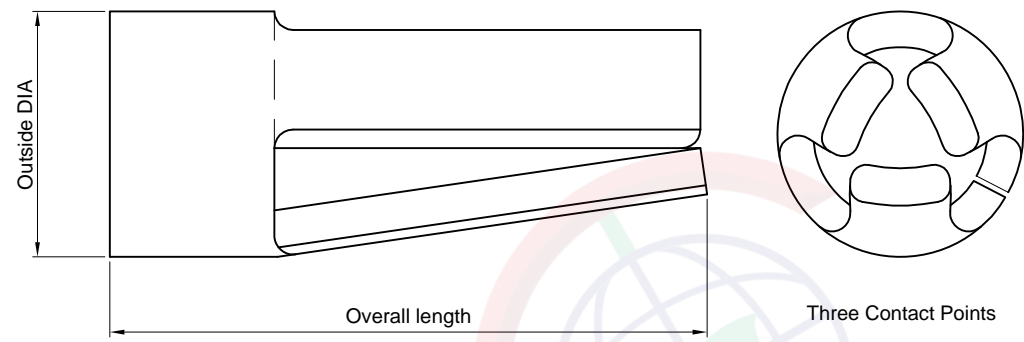

**Technical specifications:**

1. Material: Beryllium copper
2. Rated current: 1A
3. Contact resistance: 10mΩ Max.
4. Product number code:  
DS1008-01 - CF <sup>X</sup>

Part number code  
 T-1x  
 T-1Lx  
 T-2  
 See Tabel A:

Tabel A:

Part number	Outside diameter	Overall length	Operating range pin dia.	Test pin diameter	Maximum insertion force	Minimum withdrawal force
CFT-1x	0.787	1.905	0.381-0.508	0.432	80 GM	15 GM
CFT-1Lx	0.787	1.905	0.381-0.533	0.457	90 GM	14 GM
CFT-2	0.813	1.270	0.381-0.457	0.432	400 GM	100 GM
CFT-3	0.787	1.905	0.381-0.508	0.432	42 GM	14 GM
CFT-3X	0.787	1.905	0.381-0.533	0.457	35 GM	14 GM
CFT-4	0.597	1.651	0.178-0.330	0.279	30 GM	9 GM
CFT-5	0.498	1.346	0.152-0.279	0.203	30 GM	10 GM



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	THREE FINGER CLIPS	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1008-01 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONFLY CONNFLY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1008-01-X-B					

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or reproduction of any part of this drawing without the prior written permission of CONNFLY is strictly prohibited. CONNFLY may enforce its intellectual property rights at its own discretion, failures or delays in exercising such rights does not constitute a waiver of such rights.