
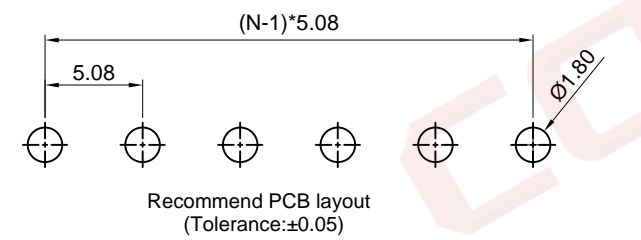
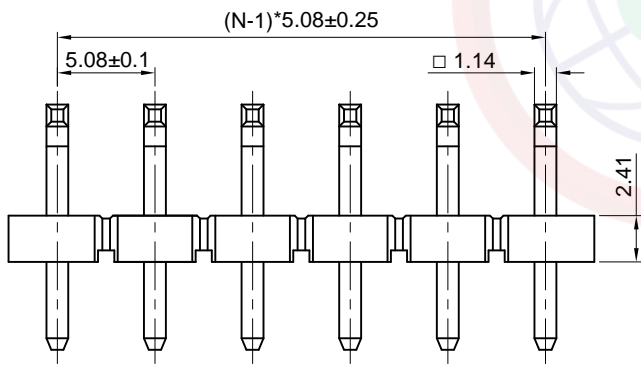


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

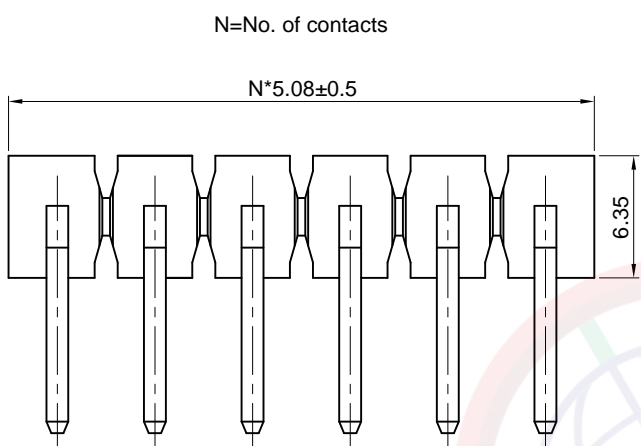

(Series Image-Reference Only)

Table A:

Type	Dimension		
	A	B	C
1	4.57	7.62	8.08
2	3.96	7.62	13.82

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE	PIN HEADER PITCH 5.08mm SINGLE R/A TYPE
X. ±0.60	X. ±5°	UNITS	mm	
.X ±0.38	.X ±3°	SHEET SIZE	A4	
.XX ±0.25	.XX ±2°	DRAWING TYPE	CUSTOMER	SERIES
SCALE	1:1	SHEET	1 OF 1	DS1022-16 SERIES
DRAWING NO.	C-DS1022-16-XXXX-X-C			


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 05/08/12'		LJC 05/08/12'
B	DRAWING UPDATE	JLZ 12/04/17'	HZW 12/04/17'	LJC 12/04/17'
C	DRAWING UPDATE	JLZ 12/22/18'		

NOTES:

- Specifications:
- Contact resistance: 20mΩ Max.
 - Insulation resistance: 1000MΩ Min.
 - Dielectric withstanding voltage: 1000V AC(Rms) for 1 minute.
 - Current rating:7A.
 - Voltage rating:250V AC Rms.
 - Temperature: -40°C~+105°C.

Materials:

- Contact material: Copper alloy.
 - Contact plating: Gold plating over nickel.
 - Insulator material: High temp,Black,UL94-V0.
- Product number code:

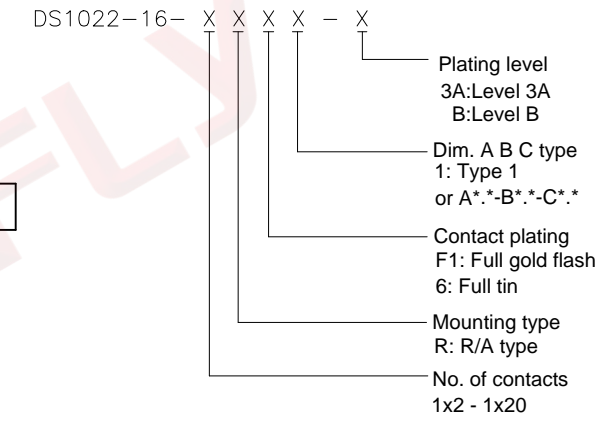

晨翔电子有限公司
CONNELY ELECTRONIC CO. LTD