
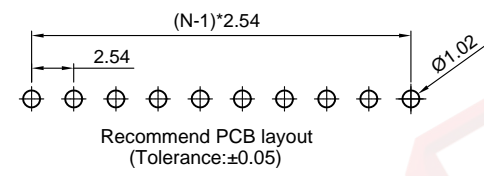
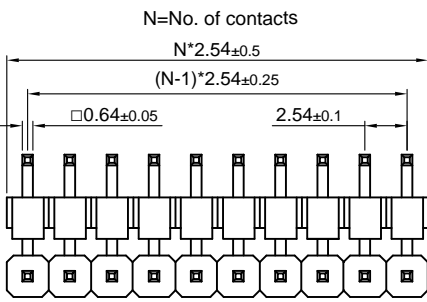


| | |
|------|---|
| Dept | |
| Qty | |
| DC | 1 |
| ED | 1 |
| IE | 1 |
| ISO | 1 |
| PD | 1 |
| R&D | 1 |
| SD | 1 |
| QA | 1 |
| QC | 1 |
| QE | 1 |

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

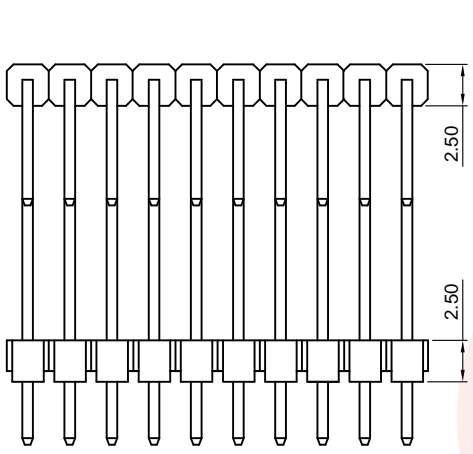

(Series Image-Reference Only)

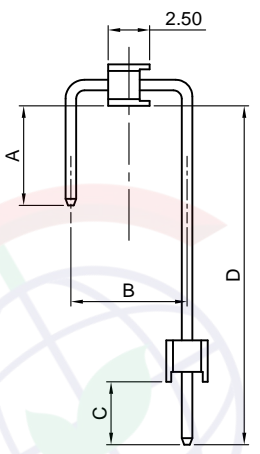


Table A:

| Type | Dimension | | | |
|------|-----------|------|------|-------|
| | A | B | C | D |
| 1 | 6.00 | 7.00 | 6.00 | 38.10 |

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|----------------|---------------|---------|---------------|
| A | NEW RELEASE | YCH 05/09/12' | | LJC 05/09/12' |
| B | DRAWING UPDATE | JLZ 08/14/20' | | |

NOTES:

Specifications:

- Contact resistance: 20mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 600V AC(Rms) for 1 minute.
- Current rating:3A.
- Voltage rating:250V AC Rms.
- Temperature: -40°C~+105°C.

Materials:

- Contact material: Copper alloy.
- Contact plating: Gold or Tin plating over nickel.
- Insulator material: PBT,Black,UL94-V0.

Product number code:

DS1029-15 - X X X X X X - X

- Plating level
3A:Level 3A
B:Level B
- Dim. A B C D type
1: Type 1
or A*.*-B*.*-C*.*-D*.*
- Mounting type
R: R/A type
- Housing color
B:Black
- Contact plating
8: Full gold flash
6: Full tin
- Connector type
P:Plug
- No. of contacts
1x1 - 1x40

| | | | | | | | |
|-------------------|-------|------------------------|--------|--|----|---------------------------|-------------------|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | 2.54mm Pin Header |
| X. | ±0.60 | X. | ±5° | UNITS | mm | Single Row Stack R/A Type | |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | SERIES | DS1029-15 SERIES |
| .XX | ±0.25 | .XX | ±2° | 晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD | | | |
| DRAWING TYPE | | CUSTOMER | | | | | |
| SCALE | 1:1 | SHEET | 1 OF 1 | | | | |
| DRAWING NO. | | C-DS1029-15-XXXXXX-X-B | | | | | |

 晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD