





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/01/17'	~	

NOTES:


- SPECIFICATIONS
 - Current Rating: 1.0A
 - Insulation Resistance: 500MΩ Min
 - Dielectric Withstanding: 300V AC
 - Contact Resistance: 20mΩ Max
 - Operating Temperature: -40°C to+105°C
- MATERIALS:
 - Housing: Thermoplastic(UL94 V-0)
 - Contact: Copper alloy

3.PRODUCT NUMBER CODE:
DS1065-18 - X X X X X X X

- PACKING TYPE
R:TAPE ON REEL
B:TUBE
- PICK UP SUPPORT
S:W/ PICK UP
X:W/O PICK UP
- MOUNTING TYPE
S:SMT TYPE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
S:SOCKET
- No.OF CONTACTS
2*2-2*40

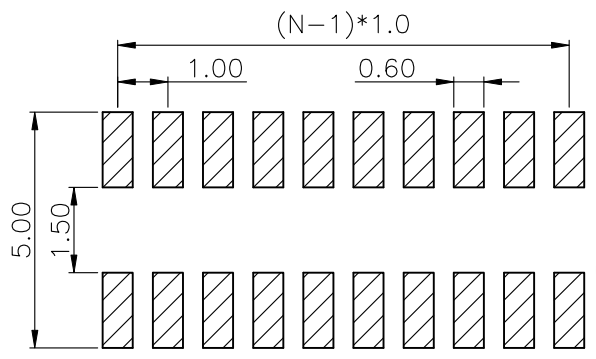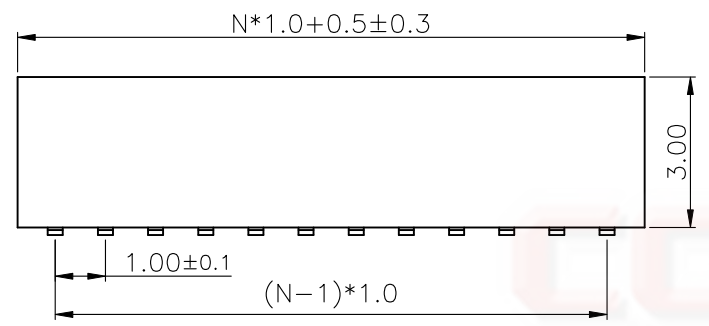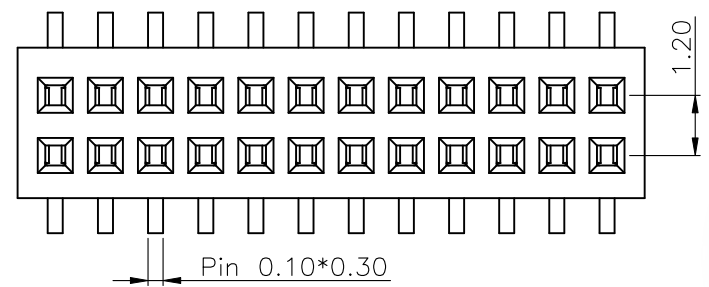

RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)

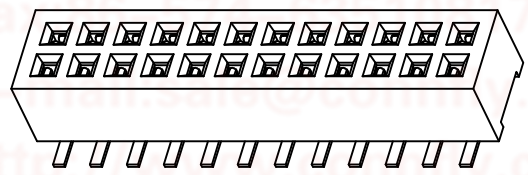

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1065-18-XXXXXXX-A		

PROJECTION		TITLE	1.00*1.20mm Female Header Double Row SMT Type
UNITS	mm	SERIES	DS1065-18 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD