


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 12/16/09'		LJC 12/16/09'
B	DRAWING UPDATE	JLZ 04/20/21'		

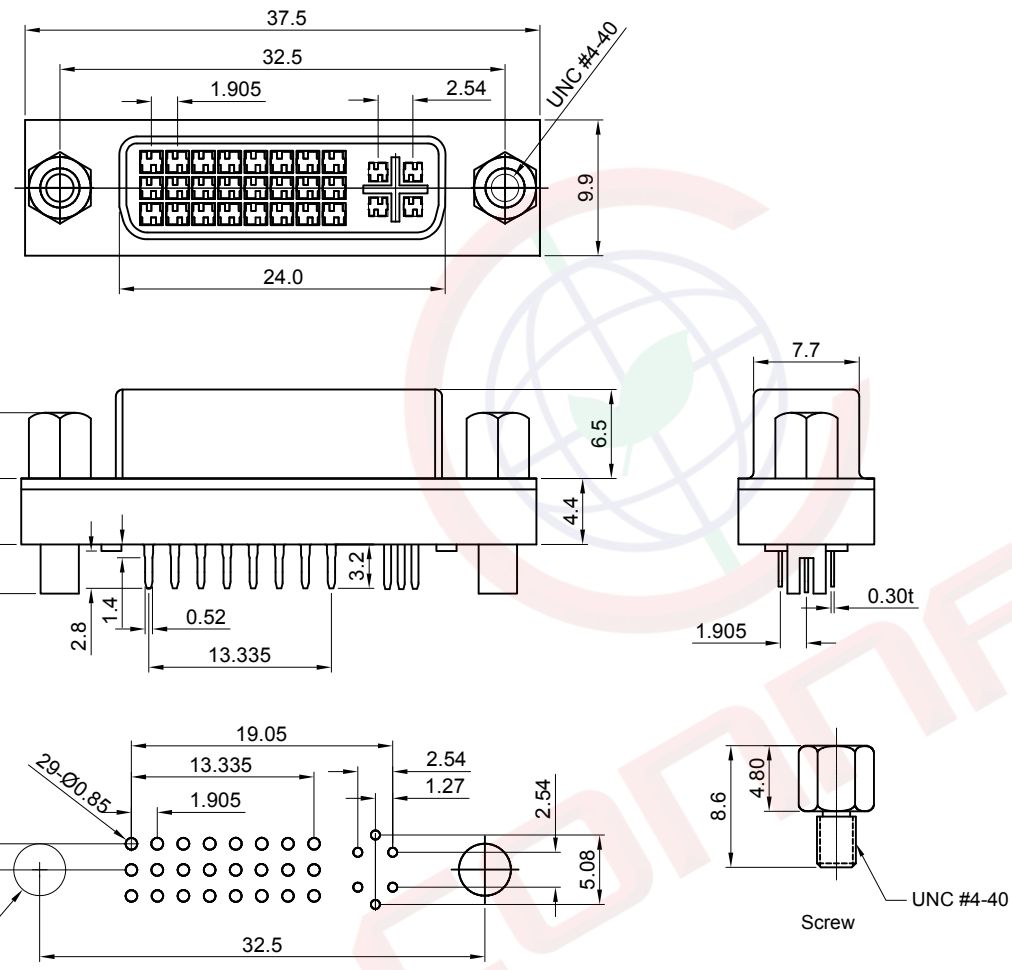

Recommend PCB Layout
(Tolerance:±0.05)



(Series Image-Reference Only)

NOTES:

Specifications:

1. Contact resistance: 20mΩ Max.
2. Insulation resistance: 500MΩ Min.
3. Dielectric withstanding voltage: 500V AC(RMS) for 1 minute.
4. Current rating:3A Max.
5. Temperature: -20°C~+85°C.

Materials:

1. Contact material: Copper alloy.
2. Contact plating: Selective gold plating over nickel.
3. Insulator material: Nylon.

Product number code:

DS1091-02 - X X X X

- Screw type
X: W/O screw
S: W/ #4-40(UNC) screw
D: Rivet type with screw in bulk package
- Contact plating
0: Selective gold flash
- Shell plating
N: Nickel
6: Tin
- Housing color
B: Black
W: White

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	DVI Receptacle 24+5 Vertical Through Type				
X.	±0.60	X.	±5°	UNITS	mm						
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1091-02 SERIES				
.XX	±0.25	.XX	±2°								
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD							
SCALE		1:1						SHEET		1 OF 1	
DRAWING NO.		C-DS1091-02-XXXX-B									