


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/09/15'	~	

- NOTES:
- INSULATOR RESISTANCE: 100MΩ Min. AT 100V DC.
 - CURRENT RATING: 1.8A FOR PIN1 AND PIN5.
 - DIELECTRIC STRENGTH: AC 100V FOR 1 Minute.
 - HOUSING: THERMOPLASTIC (UL 94-0).
 - CONTACT: COPPER ALLOY
 - SHELL: STEEL.
 - HOOK: STEEL.
 - PRODUCT NUMBER CODE:
DS1105-04 - X X X X

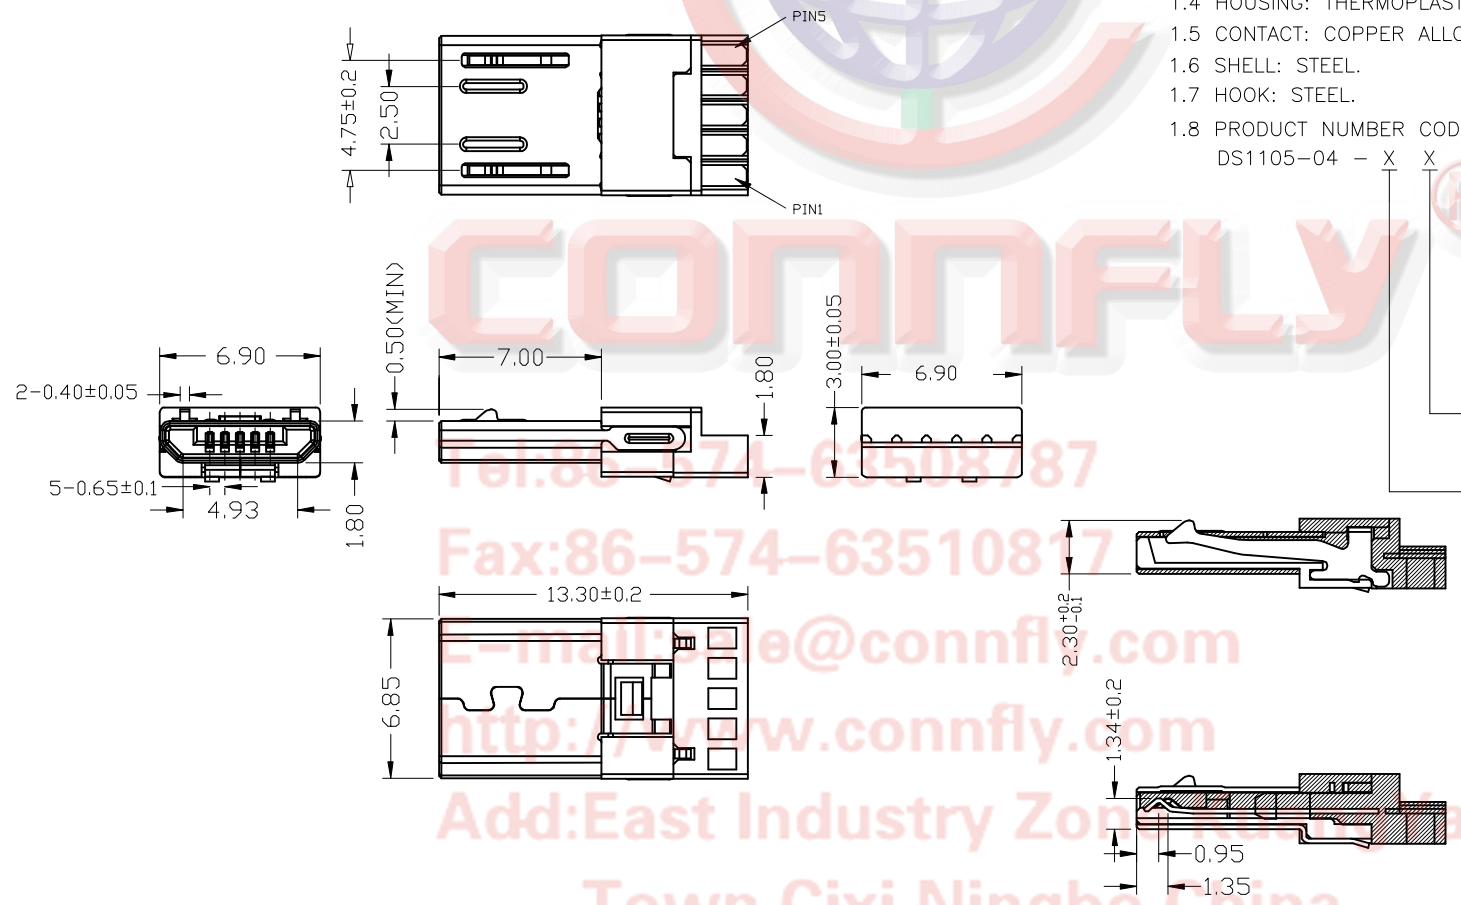

- 4,5PIN TYPE
 - A:Cutting-out
 - B:Open circuit
- CONTACT PLATED:
 - 0: Selective Gold Flash
 - C: Selective Gold 3u"
 - 3: Selective Gold 30u"
- SHELL PLATED:
 - N: Nickel
 - 6: Tin
- COLOR OF HOUSING:
 - B: Black

CONNFLY
 Tel:86-574-63508787
 Fax:86-574-63510877
 E-mail:connfly@connfly.com
 http://www.connfly.com
 Add:East Industry Zone
 Town Cixi Ningbo China
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MICRO USB MALE
X.	±0.60	X.	±5°	UNITS	mm	5P(Front 5 Back 5) SOLDER TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1105-04 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1105-04-XXXX-A					