


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/21/09'		

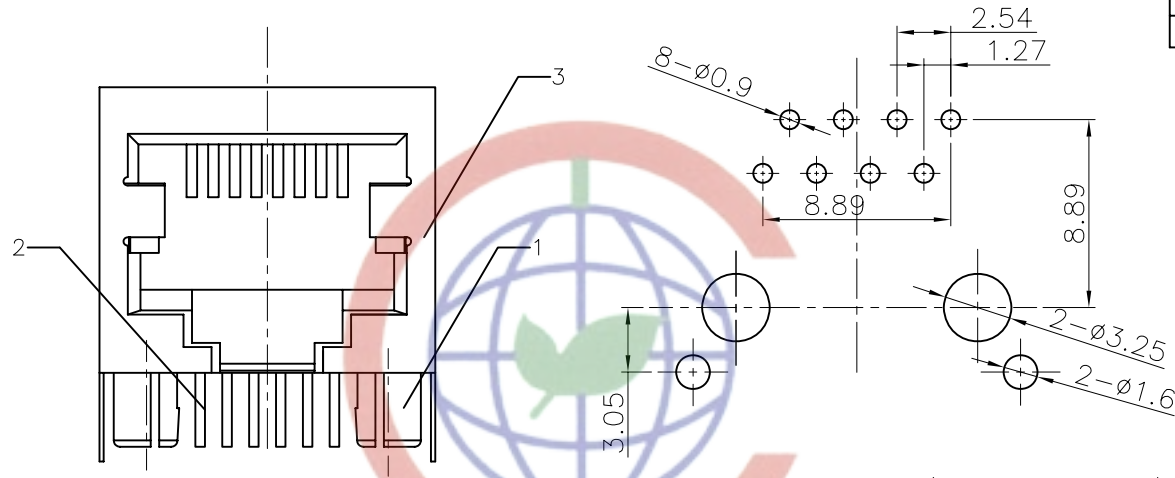



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

SPECIFICATION

- Insulation Resistance:1000MΩ Min.
- Withstand Voltage:500V,AC/Minute.
- Durability:600 Cycles Min.
- Product Number Code:

DS1128 -01 -X X X X

- Housing Color
B:Black
- Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch
- No.Of Contacts
4:8p4c 6:8p6c 8:8p8c
- Connector Type
S:Socket

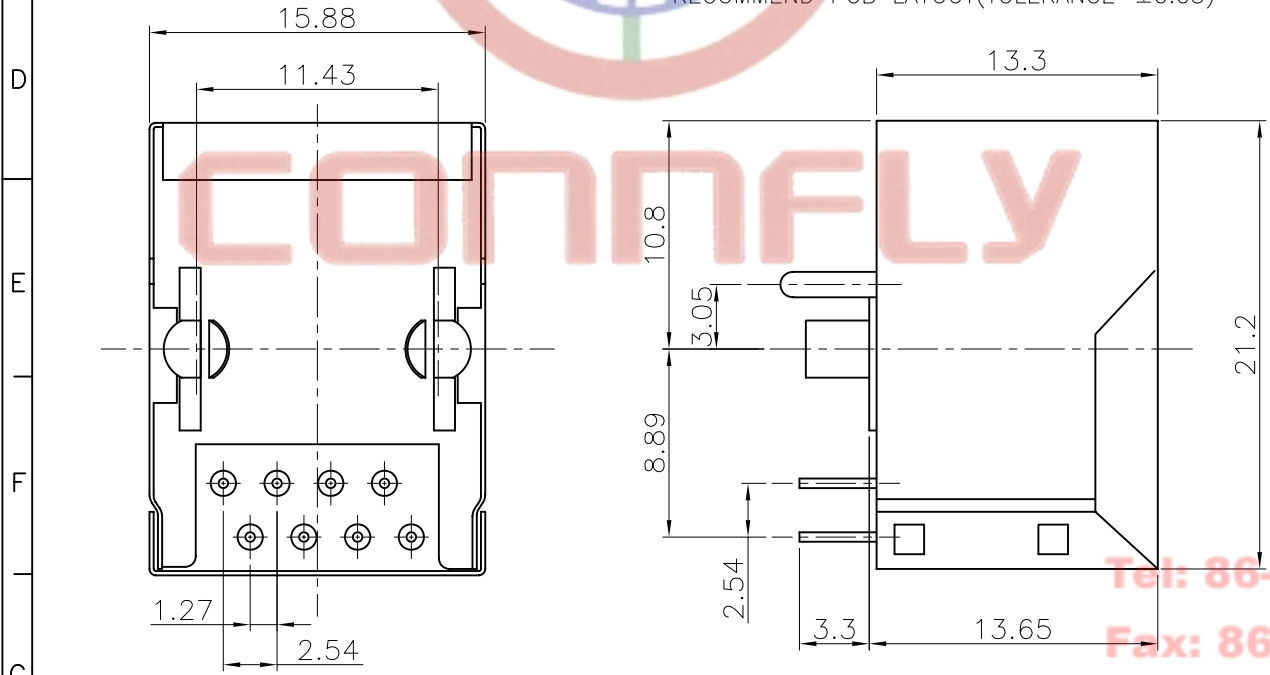

Tel: 86-574-63508787

Fax: 86-574-63510817

E-mail: sale@zhengjin.com.cn

Http://www.zhengjin.com.cn

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		PCB JACK 8P 1PORT
.X	±0.38	.X	±3°	mm	3.05mm Layout
.XX	±0.25	.XX	±2°	A4	SERIES DS1128-01 SERIES
DRAWING TYPE		CUSTOMER		SCALE	
				1:1 SHEET 1 OF 1	
DRAWING NO.		C-DS1128-01-XXXX			

No.	PART NAME	Q'ty	MATERAIL	REMARK
(3)	SHIELDING	1	COPPER ALLOY	NICKEL PLATING
(2)	PIN		PHOSPHOR BRONZE	GOLD PLATING
(1)	HOUSING	1	PBT OR NYLON	G.F FILLED UL94 V-0

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD