



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/06/16'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - VOLTAGE RATING:125V.
 - CURRENT RATING:1.5A.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+85°C.
- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: SELECTIVE GOLD.
 - INSULATOR MATERIALS: PBT OR NYLON BLACK.
- PRODUCT NUMBER CODE:

DS1129-03-X X X X X - X

 - Shell Type
N/A:W/ Shrapnel
X:W/O Shrapnel
 - Housing Materials
N:Nylon
P:PBT
 - Housing Color
B:Black
 - Contact Plating
0:Selective Gold Flash
3:Selective 30u"Gold
4:Selective 3u"Gold
 - No.Of Contacts
8:8p8c
 - Connector Type
S:Socket

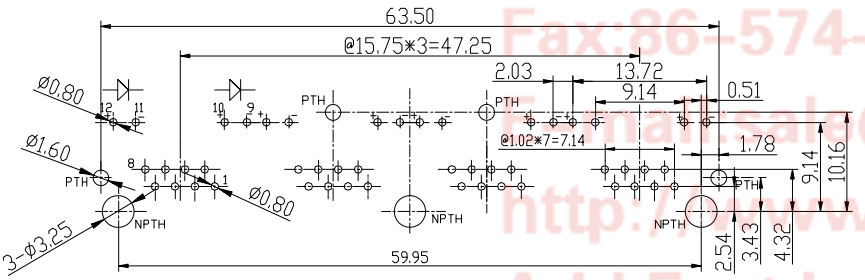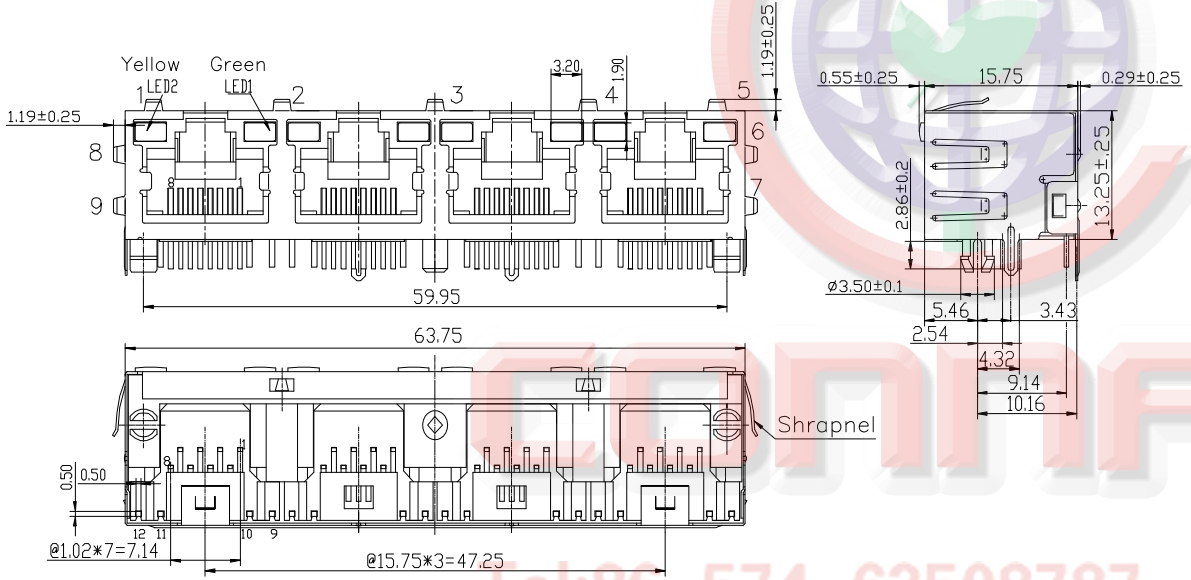

Tel:86-574-63508787
 Fax:86-574-63510817
 Email:connfly@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1129-03-XXXXX-X-A		

PROJECTION		TITLE	PCB JACK 8P 4PORT WITH LED
UNITS	mm	SHEET	A4
SHEET SIZE	A4	SERIES	DS1129-03 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD