

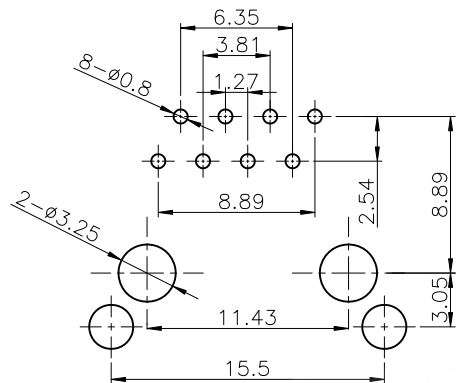


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/26/06'		LJC 06/26/06'
B	DRAWING UPDATE	JLZ 07/03/17'		

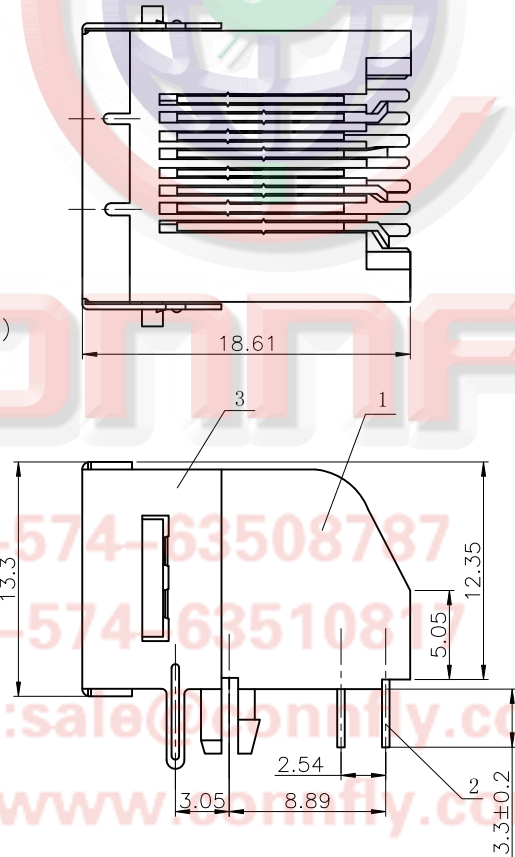

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

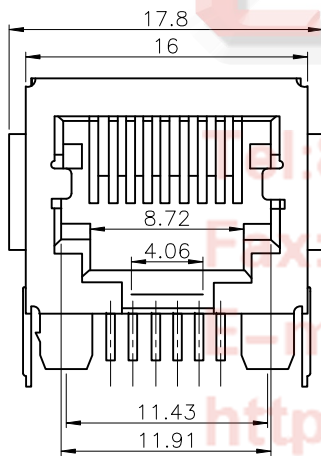

SPECIFICATION

1. Insulation Resistance:1000MQ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Mating Cycles Min.
4. Product Number Code:

DS1134-03-X X X X X X

Ear Support
S:W/ Ear
X:W/O Ear

Housing Materials
P:PBT
N:NYLON

Housing Color
B:Black

Contact Plating
0:Selective Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch

No.Of Contacts
8:8P8C

Connector Type
S:Socket

Series No.
DS1134-03

(3)	SHIELDING	1	COPPER ALLOY WITH NICKEL PLATED	0.25mm Thickness
(2)	PIN		PHOSPHOR BRONZE	Selective Gold Flash
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2
No.	PART NAME	QTY	MATERAIL	REMARK

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1134-03-XXXXX-B	

PROJECTION	TITLE
	PCB JACK 8P WITH SHIELDING TYPE
UNITS	mm
SHEET SIZE	A4
SERIES	DS1134-03 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

86-574-63508787
86-574-63510811
mail:sale@connfly.com
http://www.connfly.com
Add:East Industry Zone KuangYan
Town Cixi Ningbo China
P.C:315333