



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/20/14'		LJC 06/20/14'
B	DRAWING UPDATE	JLZ 05/10/16'	HZW 05/10/16'	LJC 05/10/16'
C	DRAWING UPDATE	JLZ 02/24/17'		

Notes:

- 1.Materials
 - 1.1. Insulator: thermoplastic
- 2.Specifications
 - 2.1. Temperature range: -20~+80°C.
 - 2.2. Contact resistance: 100mΩ max.
 - 2.3. Insulation resistance: 1000MΩ min.
 - 2.4. Dielectric withstanding voltage: AC 500V Per minute.
- 3.Product number code:

DS1136-25 - X X N X

- Housing color
V: Ivory
- Connector type
S: socket
- No. of contacts
300: 300 Positions
- SERIES No.
DS1136-25

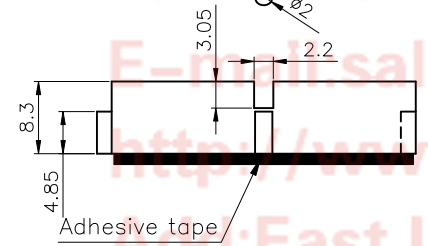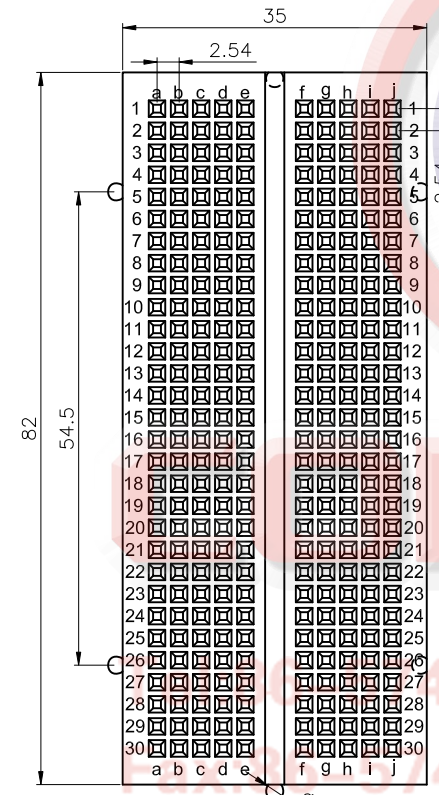

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm Bread Board 300 Positions	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1136-25 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO., LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1136-25-XXXX-C						