
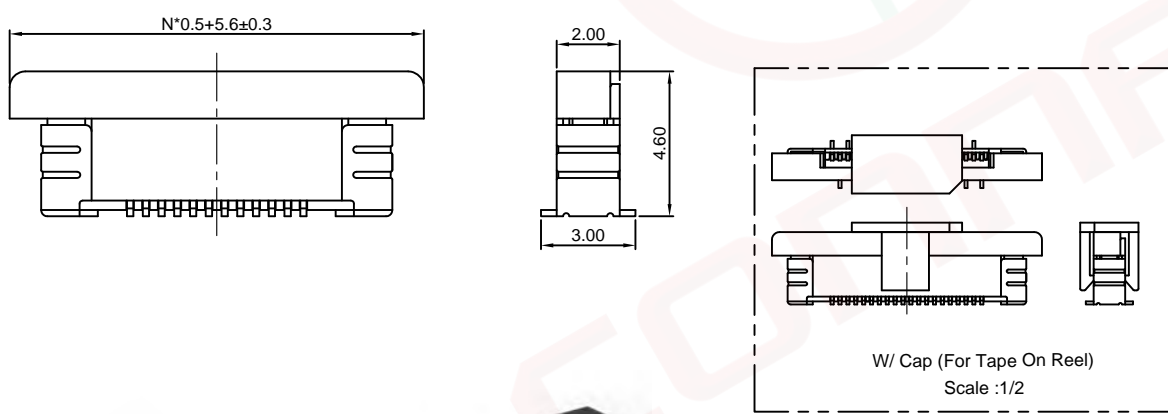
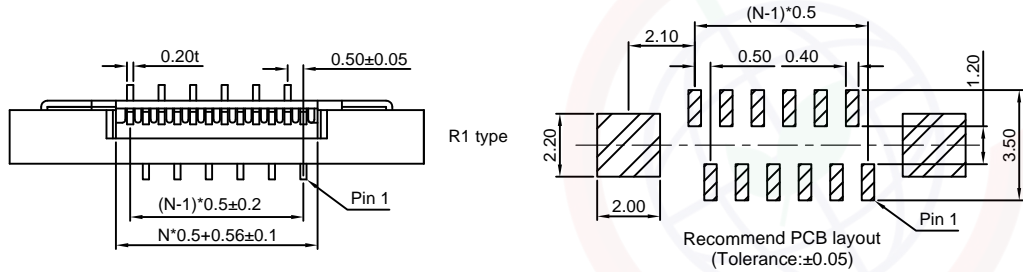


| | |
|------|---|
| Dept | |
| Qty | |
| DC | 1 |
| ED | 1 |
| IE | 1 |
| ISO | 1 |
| PD | 1 |
| R&D | 1 |
| SD | 1 |
| QA | 1 |
| QC | 1 |
| QF | 1 |

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|----------------|---------------|---------|---------------|
| A | NEW RELEASE | YCH 09/04/08' | | LJC 09/04/08' |
| D | DRAWING UPDATE | JLZ 03/04/19' | | |
| | | | | |

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

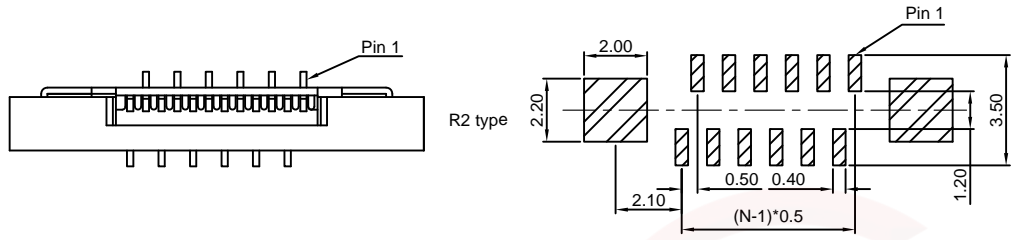

NOTES:

Specifications:

- Contact resistance: 30MΩ Max.
- Insulation resistance: 100MΩ Min.
- Dielectric withstanding voltage: 250V AC(RMS) for 1 minute.
- Current rating:0.5A AC/DC.
- Voltage rating:50V AC/DC.
- Temperature: -25°C~+85°C.


Materials:

- Contact material: Copper alloy.
- Contact plating: Gold/tin plating over nickel.
- insulator material: Hight temp,ul94-v0.

Product number code:

DS1020-08- X X X X X - X

- X X X X X - X
- Packing type
R: Tape on reel
N/A code: Tube
- Bend type
1: R1 type
2: R2 type
- Contact plating
T1: Tin
8: Full gold flash
- Cover color
B:Black
- Housing color
V:Ivory
- No. of contacts
04~39

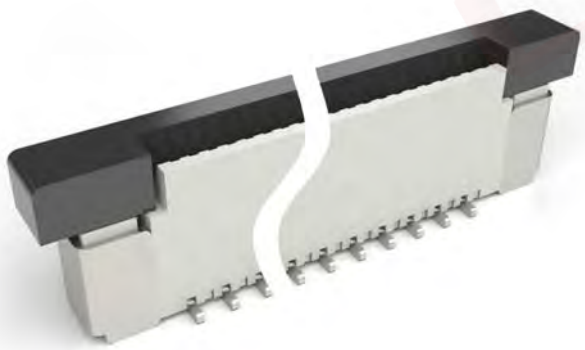

(Series Image-Reference Only)

| | | | | | | | | |
|-------------------|-------|-----------------------|--------|---|----|------------------|----------------------|--|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | 0.50mm FPC CONNECTOR | |
| X. | ±0.60 | X. | ±5° | UNITS | mm | ZIF V/T SMT TYPE | | |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | SERIES | DS1020-08 SERIES | |
| .XX | ±0.25 | .XX | ±2° | 晨翔电子有限公司 CONNELY ELECTRONIC CO., LTD | | | | |
| DRAWING TYPE | | CUSTOMER | | | | | | |
| SCALE | 1:1 | SHEET | 1 OF 1 | | | | | |
| DRAWING NO. | | C-DS1020-08-XXXXX-X-D | | | | | | |