


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves all rights in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

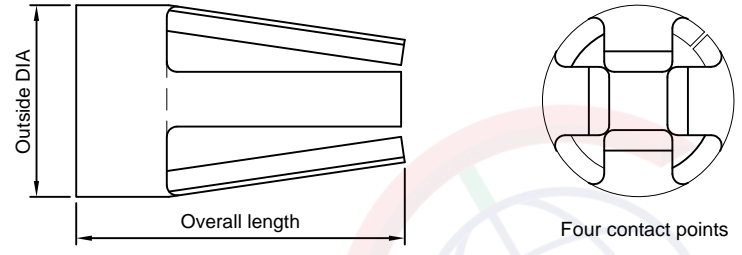

Technical specifications:

- 1.Material: Beryllium copper
- 2.Ratde current: 1A
- 3.Contact resistance: 10mΩ Max.
- 4.Product number code:

DS1008-02 - CF X

└ Part number code

1S

1SH

3Sx

See tabel A:



(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 01/09/09		LJC 01/09/09
B	DRAWING UPDATE	JLZ 08/14/18'		

TABEL A:

Part number	Outside diameter	Overall length	Operating range pin dia.	Test pin diameter	Maximum insertion force	Minimum withdrawal force
CF-1S	1.118	1.651	0.381-0.559	0.457	135 GM	25 GM
CF-1SH	1.118	1.651	0.381-0.559	0.457	260 GM	55 GM
CF-3Sx	1.118	1.651	0.381-0.559	0.457	520 GM	120 GM
CF-1L	1.118	2.108	0.381-0.559	0.457	45 GM	15 GM
CF-3x	1.118	2.108	0.381-0.635	0.432	270 GM	90 GM
CF-3H	1.118	2.108	0.381-0.635	0.457	675 GM	200 GM
CF-4	1.346	2.972	0.559-0.813	I - 0.660 W - 0.610	385 GM	50 GM
CF-5	1.753	3.810	0.914-1.270	I - 1.016 W - 0.762	325 GM 55 GM	60 GM 15 GM
CF-6	2.032	3.810	1.016-1.499	I - 1.270 W - 1.016	375 GM	35 GM
CF-7S	1.626	2.413	0.813-1.143	1.016	2.27 KG	200 GM
CF-7	1.613	3.048	0.813-1.168	I - 1.041 W - 0.991	350 GM	55 GM
CF-7L	1.626	3.048	0.813-1.143	I - 1.016 W - 0.889	1.02 KG	110 GM
CF-8	2.235	3.150	1.219-1.626	I - 1.524 W - 1.270	440 GM	60 GM
CF-9	2.743	3.759	1.651-2.083	I - 1.880 W - 1.829	1.36 KG	230 GM

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	FOUR FINGER CLIPS	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1008-02 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1008-02-X-B					